


PX-9

SPEC SHEET

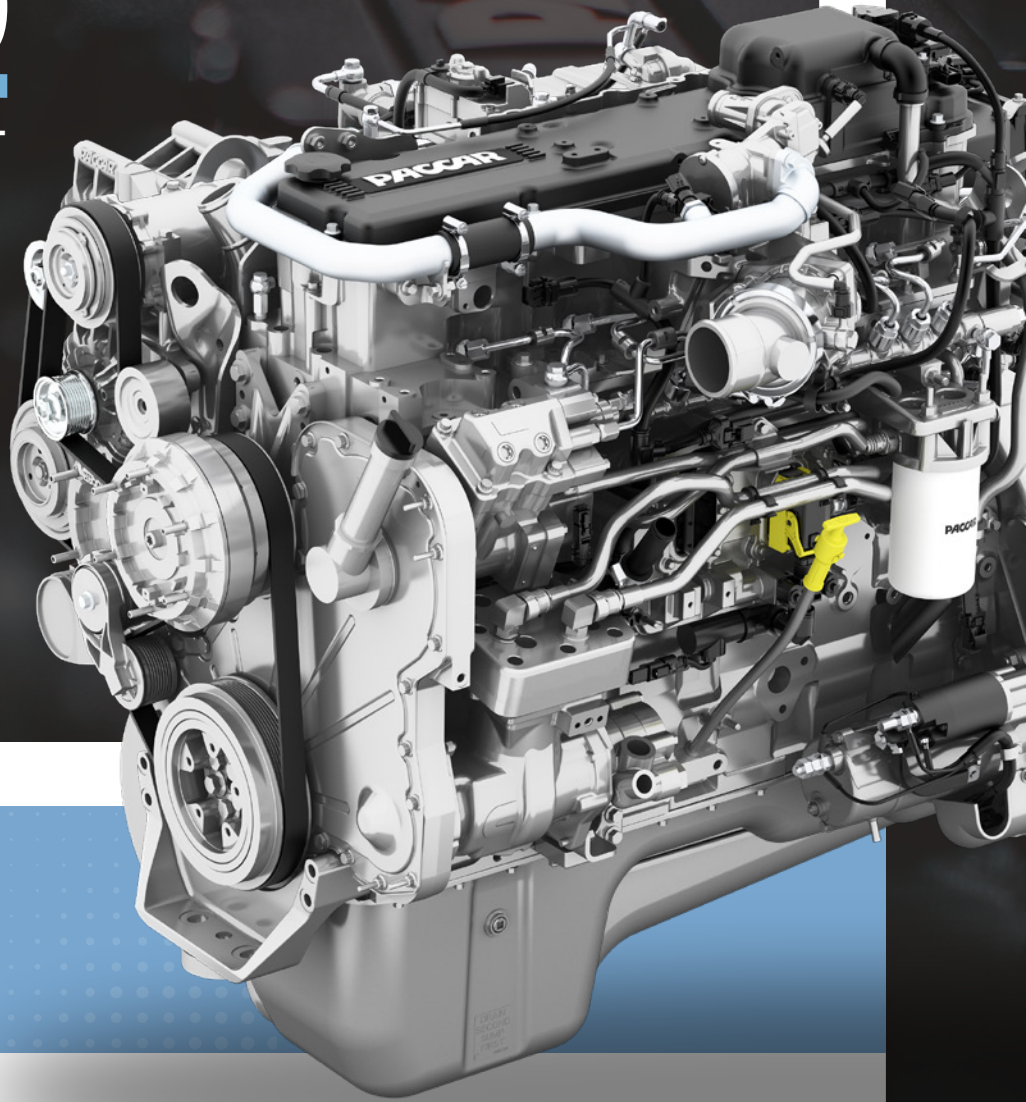




The 8.9-liter PACCAR PX-9 engine has one of the highest power-to-weight ratios in its class, and will move heavy payloads without hesitation.

Available in both medium and heavy-duty configurations this engine delivers the durability and efficiency needed to lower operating expenses, reduce maintenance and increase productivity.

RATINGS

PEAK HORSEPOWER	PEAK TORQUE (LB-FT @ RPM)	
260	860 @ 1,200	○
270 ¹	860 @ 1,200	○
300 ¹	860 @ 1,200	○
330 ¹	1,000 @ 1,200	○
350	1,050 @ 1,200	○
360 ¹	1,150 @ 1,200	○
370 ¹	1,250 @ 1,200	○
380	1,250 @ 1,200	○
380 ²	1,150 @ 1,200	○
400 ²	1,250 @ 1,200	○
450 ²	1,250 @ 1,200	○

¹Also Fire Service Rating; ²Fire Service Rating Only

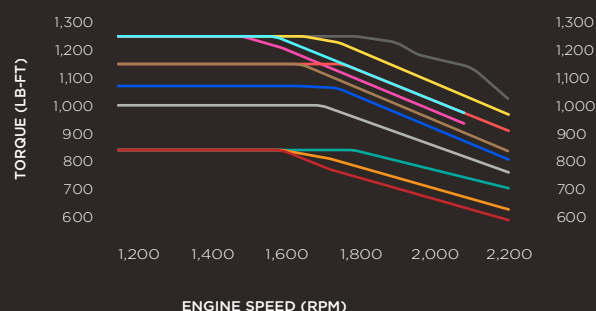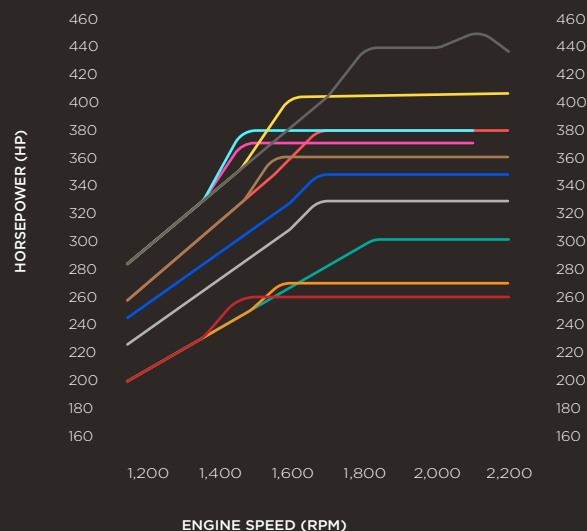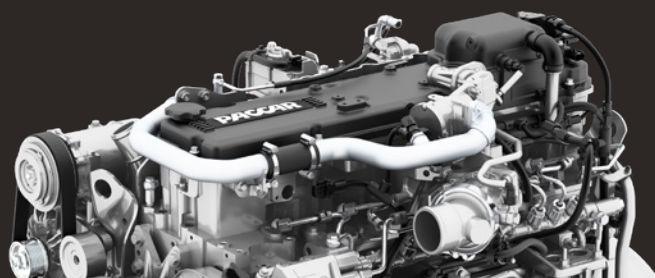

SPECIFICATIONS

CONFIGURATION	Inline 6-Cylinder	PEAK TORQUE	860-1,250 LB.-FT.
BORE X STROKE (MM)	114x145	GOVERNED SPEED	2,100-2,200 RPM
DISPLACEMENT	8.9 Liters	CLUTCH ENGAGEMENT TORQUE³	500 LB.-FT. @ 700 RPM
DRY WEIGHT	1,695 LBS.	BASE WARRANTY⁴	2 Yrs/250K Miles/400K KM
OIL SYSTEM CAPACITY	29 U.S. Quarts	CERTIFICATION	EPA 2021
HORSEPOWER	260-450 HP		

³ Determined By Engine Horsepower and Idle Setting
⁴ Extended Protection Plans Available

MAINTENANCE INTERVALS

MAINTENANCE ITEM	MILES	KILOMETERS
FUEL FILTER	50,000	80,000
OIL AND FILTER	50,000 ⁵	80,000
DEF FILTER	200,000	320,000

⁵ Duty cycle dependent. Please reference Operator's Manual.



Note: Equipment and specifications shown in this brochure are subject to change without notice. Consult with your PACCAR Engine distributor at time of ordering for standard and optional equipment. PX-9 is a trademark of PACCAR Inc.

VISIT PACCARPOWERTRAIN.COM TO FIND A LOCAL DEALER